


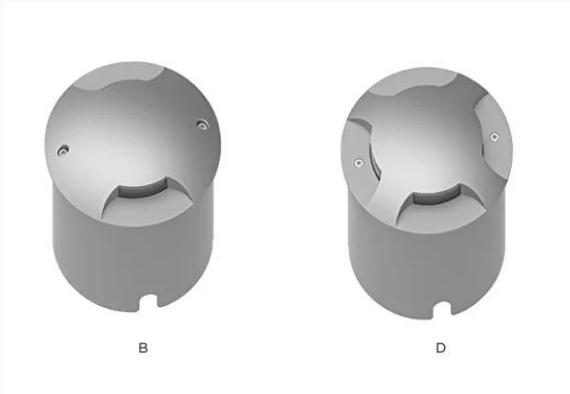

RIO

MAZDA Model: RMXR5920 Inground Light

Rio floor, underground light is built with a durable die-cast aluminum alloy lamp body and a transparent PC diffuser that ensures even and efficient light output. Engineered for outdoor performance, it features a waterproof silicone rubber gasket and a pure polyester powder-coated finish, offering excellent resistance to weather, corrosion, and UV exposure.

The fixture includes a pure aluminum recessed box for secure installation, making it ideal for pathways, driveways, landscapes, and architectural accent lighting where durability and sleek integration are essential

ALL AVAILABLE VARIANTS

#	Code	WATT	CCT	Voltage	Body Color	Emergency Backup	Control	Beam Angle	Dimension	Material	IP	Dimensions	Price
1	MAZDA-RMXR59205W-3K-240V-BL-10VDIM-A150 X B135 MM	5W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
2	MAZDA-RMXR59205W-3K-240V-BL-PH-A150 X B135 MM	5W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
3	MAZDA-RMXR59205W-3K-240V-BL-DA-A150 X B135 MM	5W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
4	MAZDA-RMXR59205W-3K-240V-BL-ND-A150 X B135 MM	5W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
5	MAZDA-RMXR59205W-4K-240V-BL-10VDIM-A150 X B135 MM	5W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
6	MAZDA-RMXR59205W-4K-240V-BL-PH-A150 X B135 MM	5W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
7	MAZDA-RMXR59205W-4K-240V-BL-DA-A150 X B135 MM	5W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
8	MAZDA-RMXR59205W-4K-240V-BL-ND-A150 X B135 MM	5W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
9	MAZDA-RMXR59205W-5K-240V-BL-10VDIM-A150 X B135 MM	5W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
10	MAZDA-RMXR59205W-5K-240V-BL-PH-A150 X B135 MM	5W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
11	MAZDA-RMXR59205W-5K-240V-BL-DA-A150 X B135 MM	5W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
12	MAZDA-RMXR59205W-5K-240V-BL-ND-A150 X B135 MM	5W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
13	MAZDA-RMXR59205W-6K-240V-BL-10VDIM-A150 X B135 MM	5W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
14	MAZDA-RMXR59205W-6K-240V-BL-PH-A150 X B135 MM	5W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
15	MAZDA-RMXR59205W-6K-240V-BL-DA-A150 X B135 MM	5W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
16	MAZDA-RMXR59205W-6K-240V-BL-ND-A150 X B135 MM	5W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
17	MAZDA-RMXR59205W-2.7K-240V-BL-10VDIM-A150 X B135 MM	5W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	



DATASHEET

GENERATED ON: 28 Sep 2026 | SYS.REF: MAZDA-LED

#	Code	WATT	CCT	Voltage	Body Color	Emergency Backup	Control	Beam Angel	Dimension	Material	IP	Dimensions	Price
18	MAZDA-RMXR59205W-2.7K-240V-BL-PH-A150 X B135 MM	5W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
19	MAZDA-RMXR59205W-2.7K-240V-BL-DA-A150 X B135 MM	5W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
20	MAZDA-RMXR59205W-2.7K-240V-BL-ND-A150 X B135 MM	5W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
21	MAZDA-RMXR59205W-6.5K-240V-BL-10VDIM-A150 X B135 MM	5W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
22	MAZDA-RMXR59205W-6.5K-240V-BL-PH-A150 X B135 MM	5W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
23	MAZDA-RMXR59205W-6.5K-240V-BL-DA-A150 X B135 MM	5W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
24	MAZDA-RMXR59205W-6.5K-240V-BL-ND-A150 X B135 MM	5W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
25	MAZDA-RMXR59206W-3K-240V-BL-10VDIM-A150 X B135 MM	6W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
26	MAZDA-RMXR59206W-3K-240V-BL-PH-A150 X B135 MM	6W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
27	MAZDA-RMXR59206W-3K-240V-BL-DA-A150 X B135 MM	6W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
28	MAZDA-RMXR59206W-3K-240V-BL-ND-A150 X B135 MM	6W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
29	MAZDA-RMXR59206W-4K-240V-BL-10VDIM-A150 X B135 MM	6W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
30	MAZDA-RMXR59206W-4K-240V-BL-PH-A150 X B135 MM	6W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
31	MAZDA-RMXR59206W-4K-240V-BL-DA-A150 X B135 MM	6W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
32	MAZDA-RMXR59206W-4K-240V-BL-ND-A150 X B135 MM	6W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
33	MAZDA-RMXR59206W-5K-240V-BL-10VDIM-A150 X B135 MM	6W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
34	MAZDA-RMXR59206W-5K-240V-BL-PH-A150 X B135 MM	6W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
35	MAZDA-RMXR59206W-5K-240V-BL-DA-A150 X B135 MM	6W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
36	MAZDA-RMXR59206W-5K-240V-BL-ND-A150 X B135 MM	6W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
37	MAZDA-RMXR59206W-6K-240V-BL-10VDIM-A150 X B135 MM	6W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
38	MAZDA-RMXR59206W-6K-240V-BL-PH-A150 X B135 MM	6W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
39	MAZDA-RMXR59206W-6K-240V-BL-DA-A150 X B135 MM	6W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
40	MAZDA-RMXR59206W-6K-240V-BL-ND-A150 X B135 MM	6W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
41	MAZDA-RMXR59206W-2.7K-240V-BL-10VDIM-A150 X B135 MM	6W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
42	MAZDA-RMXR59206W-2.7K-240V-BL-PH-A150 X B135 MM	6W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
43	MAZDA-RMXR59206W-2.7K-240V-BL-DA-A150 X B135 MM	6W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	



DATASHEET

GENERATED ON: 28 Sep 2026 | SYS.REF: MAZDA-LED

#	Code	WATT	CCT	Voltage	Body Color	Emergency Backup	Control	Beam Angel	Dimension	Material	IP	Dimensions	Price
44	MAZDA-RMXR59206W-2.7K-240V-BL-ND-A150 X B135 MM	6W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
45	MAZDA-RMXR59206W-6.5K-240V-BL-10VDIM-A150 X B135 MM	6W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
46	MAZDA-RMXR59206W-6.5K-240V-BL-PH-A150 X B135 MM	6W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
47	MAZDA-RMXR59206W-6.5K-240V-BL-DA-A150 X B135 MM	6W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
48	MAZDA-RMXR59206W-6.5K-240V-BL-ND-A150 X B135 MM	6W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
49	MAZDA-RMXR592012W-3K-240V-BL-10VDIM-A150 X B135 MM	12W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
50	MAZDA-RMXR592012W-3K-240V-BL-PH-A150 X B135 MM	12W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
51	MAZDA-RMXR592012W-3K-240V-BL-DA-A150 X B135 MM	12W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
52	MAZDA-RMXR592012W-3K-240V-BL-ND-A150 X B135 MM	12W	3000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
53	MAZDA-RMXR592012W-4K-240V-BL-10VDIM-A150 X B135 MM	12W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
54	MAZDA-RMXR592012W-4K-240V-BL-PH-A150 X B135 MM	12W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
55	MAZDA-RMXR592012W-4K-240V-BL-DA-A150 X B135 MM	12W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
56	MAZDA-RMXR592012W-4K-240V-BL-ND-A150 X B135 MM	12W	4000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
57	MAZDA-RMXR592012W-5K-240V-BL-10VDIM-A150 X B135 MM	12W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
58	MAZDA-RMXR592012W-5K-240V-BL-PH-A150 X B135 MM	12W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
59	MAZDA-RMXR592012W-5K-240V-BL-DA-A150 X B135 MM	12W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
60	MAZDA-RMXR592012W-5K-240V-BL-ND-A150 X B135 MM	12W	5000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
61	MAZDA-RMXR592012W-6K-240V-BL-10VDIM-A150 X B135 MM	12W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
62	MAZDA-RMXR592012W-6K-240V-BL-PH-A150 X B135 MM	12W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
63	MAZDA-RMXR592012W-6K-240V-BL-DA-A150 X B135 MM	12W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
64	MAZDA-RMXR592012W-6K-240V-BL-ND-A150 X B135 MM	12W	6000	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
65	MAZDA-RMXR592012W-2.7K-240V-BL-10VDIM-A150 X B135 MM	12W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
66	MAZDA-RMXR592012W-2.7K-240V-BL-PH-A150 X B135 MM	12W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
67	MAZDA-RMXR592012W-2.7K-240V-BL-DA-A150 X B135 MM	12W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
68	MAZDA-RMXR592012W-2.7K-240V-BL-ND-A150 X B135 MM	12W	2700	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
69	MAZDA-RMXR592012W-6.5K-240V-BL-10VDIM-A150 X B135 MM	12W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	0/1-10 V DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	

#	Code	WATT	CCT	Voltage	Body Color	Emergency Backup	Control	Beam Angel	Dimension	Material	IP	Dimensions	Price
70	MAZDA-RMXR592012W-6.5K-240V-BL-PH-A150 X B135 MM	12W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	PHASE CUT DIMMABLE	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
71	MAZDA-RMXR592012W-6.5K-240V-BL-DA-A150 X B135 MM	12W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	DALI DIMMABLE DRIVER	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	
72	MAZDA-RMXR592012W-6.5K-240V-BL-ND-A150 X B135 MM	12W	6500	240V	BLACK, DARK GRAY	NON EMERGENCY	ON - OFF	60	A150 X B135 MM	DIE CAST ALUMINUM	IP67	A150 X B135 MM	